


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H04Q 7/32, G06F 13/00	A1	(11) International Publication Number: WO 99/34631 (43) International Publication Date: 8 July 1999 (08.07.99)
(21) International Application Number: PCT/SE98/02445 (22) International Filing Date: 23 December 1998 (23.12.98) (30) Priority Data: 9704885-4 29 December 1997 (29.12.97) SE (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: PHILIPSON, Lars; Bredgatan 7B, S-222 21 Lund (SE). SVENSSON, Per; Älgskyttevägen 29, S-226 53 Lund (SE). (74) Agents: STRÖM, Tore et al.; Ström & Gulliksson AB, P.O. Box 4188, S-203 13 Malmö (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: A PERSONAL INFORMATION MANAGEMENT SYSTEM**(57) Abstract**

A personal information management system, comprising at least a personal information manager (1), including first transceiver means (32) and first storage means (30) for personal information, and at least a communication system (2), including second storage means for personal information, connected to second transceiver means (2'), has a bi-directional link (3) between said first and second transceiver means for automatic information exchange between said system (2) and said information manager (1), whenever said system (2) and information manager (1) are within the range of said link (3).

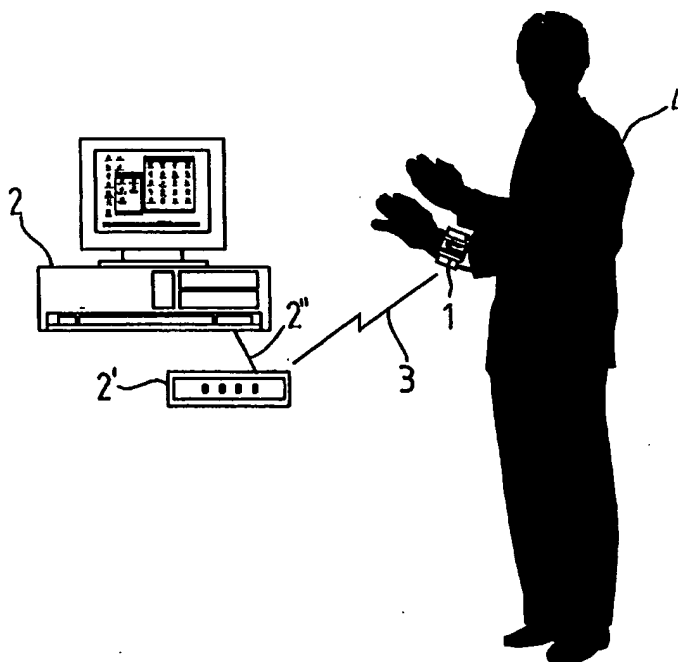

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 99/34631

1

PCT/SE98/02445

TITLE: A personal information management system

5 **Field of the Invention**

The present invention relates to a personal information management system, and particularly to a system comprising at least a personal information manager, including first transceiver means and first storage means
10 for personal information, and at least a communication system, connected to second transceiver means and to second storage means for personal information.

Description of the Prior Art

15 The need of personal information management has become increasingly important to busy-life users of personal computers. The recent development of hand-held PC's and portable digital organizers clearly indicates that the trend is towards bringing personal information closer
20 to the user. To meet this requirement several vendors offer different kinds of devices such as digital planners, digital personal organizers, electronic calenders etc.

The Timex Data Link of Timex Corporation, disclosed in The Timex Data Link Users Guide, 1994, comprises a watch
25 that can store different kinds of information that are supplied by an application on a PC (Personal Computer). The information is transferred by light signals from the PC screen to the watch. Thus, the information transfer is one way only. The Timex Data Link has the ability to store
30 appointments, anniversaries, phone numbers and tasks. Further, it has alarms, a stop watch and it provides the time in two time zones. The Timex is updated from a PC running the program Shedule+ under Microsoft Windows. In
35 Timex by letting the screen flicker while the user holds the watch in front of the screen. The light from the flickering screen is registered by the Timex and inter-

WO 99/34631

PCT/SE98/02445

2

5 preted as data. The update takes about one minute depending
on the amount of data transferred. Before the transfer the
user has to choose data to be transfered, since the space
is limited in the watch. The transfer is not incremental,
hence, all information is transferred every time.

10 The CASIO VDB-200B, Ketonic AB, Winlöf & Co, 1996, is
a watch with the ability to store telephone numbers and
other personal information. Further, the DB-200 provides
for basic clock functions such as stop watch, timer alarm
and a telememo function. However, the watch has no
abilities whatsoever to synchronize with other products
such as PCs.

15 Another product from Casio is the CASIO DBC-310, Bäck
i Backen AB/Cebes Prod. Åkersberga, 1996. It is a wrist-
worn watch, which in addition to conventional clock
functions has the capability to store phone numbers and
appointments. It also has a built-in calculator. This watch
is not provided with any means or functions enabling
synchronization with any other information source.

20 Experience has shown that if the information updating
requires user action the user just updates information for
a couple of weeks and then it stops.

25 The Palm pilot from US Robotics is a product that
works close together with a PC PIM application. It is a
small computer-like device with a relatively large touch
sensitive screen. It synchronizes with a PIM application
after it has been put in a docking station connected to a
computer.

30 Another device is REX of Rolodex, a PC card equipped
with a screen and buttons. The REX synchronizes with the
PIM application after it has been inserted into the PC card
slot.

35

WO 99/34631

3

PCT/SE98/02445

Summary of the Invention

The present invention is directed to a personal information management system, comprising a worn personal information manager and a communication system, wherein
5 said management system provides for bi-directional information exchange between said information manager and said communication system. Thus it should be possible to modify or discard information in said information manager and send the modified information from the information
10 manager to the communication system. According to claim 1 this is obtained by means of a bi-directional link, which together with the customized communications protocol provides for regular synchronization between said information manager and said communication system. Hence, the
15 information exchange between the information manager and the communication system does not require user interaction.

Another object of the invention is to provide a method of information exchange between the communication system and the information manager. This is accomplished by
20 the characterizing steps of claim 4.

An aspect of the invention is to provide a method of storing a current event time in said information manager, wherein said event time is transferred as modified information to said communication system computer device where
25 the database is updated.

Another aspect of the invention is to provide for a method of storing time intervals between at least two control time-stamps, between the beginning and the end of a particular task.

30 These aspects are obtained by means of an integrated real-time clock of the information manager.

WO 99/34631

PCT/SE98/02445

4

Brief Description of the Drawings

In order to explain the invention in more detail and the advantages and features of the invention a preferred embodiment will be described in detail below, reference being made to the accompanying drawings, in which

FIG 1 is a schematical view of a personal information management system, comprising a worn personal information manager and a computer device according to the invention;

FIG 2 is a front view of the information manager in FIG 1;

FIG 3 is a schematical view of protocol stacks according to the invention;

FIG 4 is a schematic diagram of the hardware components of the information manager in FIG 2;

FIG 5 is a flowchart of the information exchange method according to the invention; and

FIG 6 is a schematical view of the databases of the information management system of FIG 1.

Detailed Description of the Invention

The present invention is a personal information management system, comprising a personal information manager 1, including a real-time clock, first transceiver means, first storage means for personal information, a communication system such as a computer device 2, including second transceiver means 2' connected to said device 2 through a physical link 2", and a link 3 for bi-directional information exchange between said information manager 1 and said computer device 2. In the preferred embodiment of the invention the information manager 1 is in the shape of a wristwatch worn by a person 4. In the embodiment shown in FIG 1 the communication system or computer device 2 is a desktop computer (PC). However, in other embodiments of the invention the computer device 2 can be a notebook, a personal digital assistant (PDA), a handheld computer etc.

WO 99/34631

PCT/SE98/02445

5

The system according to the invention provides a convenient and powerful aid to users of for example PDAs. Personal information stored in the PC will automatically or without user interaction be transferred to the information manager, 5 when they are within the range of the link 3, described later. Once the information has been transferred it is stored in the information manager 1 and will be available therein even when the user is out of range from the link.

It also possible to modify or discard parts of information in the information manager 1 and send the changes 10 from the information manager 1 back to the computer device 2. In the preferred embodiment of the invention, this is accomplished by means of a short range radio link 3, which together with a customized communications protocol, 15 described later, provides regular synchronization between the information manager 1 and the computer device 2. Thus, the information exchange over the radio link 3 does not require any user interaction. Depending on some conditions and limitations said information exchange is initiated. As 20 described the information manager 1 and the computer device 2 have to be within the range of the link 3. Further, predetermined conditions can be set at the computer device 2, controlling when an attempt of establishing a connection for the information exchange should be made, for example 25 once every hour.

In FIG 2, a front view of the information manager 1 and its applications are illustrated. In the embodiment shown in FIG 2 the information manager 1 has four buttons 5, 6, 7, 8, as input means, each with the same function all 30 the time. This is intended for user friendliness, that is the user always knows the effect of a particular button. The upper left button 5 is a back button, which takes the user to the previous screen. The upper right button 6 starts applications, opens menues and performs actions. The 35 lower left button 7 is used to scroll left and up, and the

WO 99/34631

6

PCT/SE98/02445

lower right button 8 is used to scroll the screen right and down. In the embodiment of the invention icons, menus, lists, popup windows and status bars are used to present information to the user. Functions such as sound, text
5 scrolling and a backlight are used to enhance the user interface. Thus, information selected by the user 4 is displayed on a screen 9.

Except for the information exchange function, the information manager 1 has additional applications: a
10 calendar application 10, showing events, meetings and tasks; tasks application 11, showing tasks; contacts application 12, showing names with email and phone numbers; inbox 13, showing email subjects, SMS; information 14, showing various information collected on the Internet like
15 weather forecasts, stock quotation etc.; clock functions 15, such as worldclock, alarm, stopwatch, timer etc provided by a real-time clock. The first five applications 10-14 show and handle information sent from the computer device 2.

20 A customized protocol is provided to ensure efficient use of the radio link 3, illustrated in FIG 3. The protocol also handles error detection and flow control. Further, a data protection code is tied to every packet, so that information is not sent to the wrong destination watch.

25 The protocol is implemented in the information manager to ensure reliable and error free data communication with the computer device, on a point-to-point radio link 3. In order to establish a connection and transfer information between the information manager 1 and the
30 computer device 2, transceiver means are needed in both the information manager 1 and the computer device 2. The information manager 1 is provided with first transceiver means, described later, and the computer device 2 is provided with second transceiver means 2', a plug-in radio
35 in the embodiment, see FIG 1. The plug-in radio is

WO 99/34631

7

PCT/SE98/02445

connected to the computer device 2 through a serial PC-card. The protocol is based on the high level datalink control, HDLC, protocol. FIG 3 illustrates the protocol stacks used by the protocol for transferring data between the information manager 1 and an application running on the computer device 2. An information manager stack 16 represents the computer device 2. It has a direct physical connection 2" with the plug-in radio, represented by a physical connection layer 17 in one of two stacks 18, shown in FIG 3. The radio communicates with the information manager 1 through a radio link 3, a single, half duplex radio channel, represented by a radio link layer 19. A left stack 20 represents an information manager stack.

Commands and responses are transferred at the command layer 21 between applications on the computer device 2 and the information manager 1, respectively. It is the application that initiates all transfers at the highest level, an application layer 22. A frame layer 23 ensures reliable and errorfree transmission of frames. It also handles flow control, provides error control and data transparency. Further, a byte layer 24 is responsible for the synchronization with the radio and peer entity at the lowest level of communication. It also establishes contact between the radio 2' and the information manager 1 when the data transmission link is needed, a radio link layer 25.

As described above two separate physical layers exist between the information manager 1 and the computer device 2. The first is the radio link 3 between the information manager 1 and radio 2'. Then, the radio is connected to the computer device 2 via the physical link 2", a serial PC-card, handled by a physical connection layer 25' in the computer device 2.

The information manager 1 is constructed of electronic hardware components from various manufactures. An embodiment of the hardware of the information manager is

WO 99/34631

8

PCT/SE98/02445

shown in FIG 4. The processing element of the information manager 1 is a microchip technology PIC17C756 microcontroller 26. This device has 32 kbits of integrated program memory and a RAM of 902 bytes. A 3.579 MHz is used to generate a device clock. The microcontroller 26 includes a number of peripheral features more or less important for the functions of this invention. These functions are: power-down mode with wake-up from both external and internal interrupts; two independant USART moduls; a synchronous serial port with a fully implemented master/slave I²C mode; and four timer modules with interrupt generation.

In the embodiment the information manager 1 is provided with a display 27 S-4548ACG from Seiko Instruments. It is a graphical LCD controller/driver and features 40 x 101 graphic segments and an on-chip oscillator circuit. All communication with the microcontroller 26 is done through its built-in I²C bus interface 28.

The display 27 is also equipped with a backlight, which is in the form of an electroluminescent piece of plastic. A Sipex SP44228 circuit 29 is used as a driver.

A 256 kbit serial electrically erasable programmable memory EEPROM 30 from SGS Thomson Microelectronics is used as a non-volatile memory for storing user data. All memory accesses from the microcontroller 26 to the EEPROM 30 are performed via the bus 28.

Further a calendar circuit 31, a PCF8583 from Philips Semiconductor, is attached to the bus 28. It is configured in the clock mode using a 32.768 KHz quartz crystal. All communication with the microcontroller 26, except for interrupt signals, is handled by means of the I²C compatible interface 28.

First transceiver means 32 consist of modules from Monolithics in the embodiment. It is on-off keyed and has a maximum data rate of 2,4 kbps. The operating frequency is

WO 99/34631

PCT/SE98/02445

9

433,92 MHz. Data is sent to and from the transceiver 32 through a built-in USART module within the microcontroller 26 via a serial bus 33. Similar to the backlight 29 a piezoelectric sounder element 34 and a button set 35 is
5 connected to the microcontroller 26 via a parallel bus 36. An integrated real-time clock 36' is included to generate suitable timing signals for the various clock functions of the information manager 1. Said integrated real-time clock 36' can be a part of said calendar circuit 31.

10 The method of the information exchange according to the invention is illustrated by a flow chart in FIG 5. Since the computer device 2 always is the master, it initiates all transfers between the computer device 2 and the information manager 1. The bi-directional radio connection
15 or link 3 is established between said computer device 2 and said information manager 1 at step 37. If there is some information modified or discarded in a database in said computer device 2, command signals are sent via said link 3 and then received by the information manager 1 at step 38.
20 Thus, if there is any modified or discarded information in the databases of the computer device 2 and no polling command signals are sent, checked at step 39, the information manager executes the present command, causing manipulations of the databases and settings in said
25 information manager at step 40. This procedure is repeated until there is no command associated with modified or discarded information. Next, the computer device 2 sends a polling command to the information manager, checked at the step 39, wherein a change of the transfer direction is
30 performed, enabling said information manager 1 to send command signals to said computer device 2.

If some information in said information manager 1 is modified or discarded, checked at step 41, the information manager 1 sends the present command to the computer device
35 2 at step 42. The present command initiates manipulations

WO 99/34631

10

PCT/SE98/02445

of the data bases in the computer device 2. If no commands are left the information manager sends a command to stop the transfer at step 43 and the connection is disconnected at step 44.

5 As described, to manipulate the databases and the settings in the information manager 1, there is a set of commands available to be sent to the information manager. There are a few very general commands, which means that they can be used with all the databases and settings. By
10 using simple and general commands the command interpreter in the information manager is kept at a minimum.

 To be able to use these general commands, exact copies of the information manager databases are kept in the computer device 2. This enables the computer device 2 to
15 perform much of the logic operations needed to add, modify and delete records (information is stored in records). For example, when a new record arrives, the information manager 1 does not have to find a place for that record in a linked list since this has already been done in the computer
20 device 2.

 The databases and linked lists used in the computer device 2 as well as in the information manager 1 are illustrated in FIG 6. To add a record the computer device 2 first looks in its linked list for a free position, then it
25 sends one or more write commands to the information manager 1 to fill that position in the EEPROM 30 with data, and finally it adds the record to a present linked list by sending an add command. By sending the add command to the last there is no risk for a half-filled record being added
30 to the linked list.

 To modify a record the computer device 2 sends one or more right commands to the information manager 1 for writing in the EEPROM 30. A record is deleted by sending the delete command.

WO 99/34631

11

PCT/SE98/02445

When all commands have been sent from the computer device 2 to the information manager 1, the computer device 2 sends an information-to-send command. This command changes the direction of the communications channel. The information manager 1 responds by sending commands for manipulations of the databases in the computer device 2, for example removing a record from the calendar and tasks database. When the information manager receives an information-to-send command, it starts looking for items marked dirty or marked for deletion in the calendar and tasks database. For each record marked dirty, the information manager 1 sends a check calendar command to the computer device 2, and for each record marked for deletion it sends a delete command. When the entire calendar and tasks databases are walked through the information manager 1 sends a no-information-to-send command to tell the computer device 2 to stop the transfer. As shown in FIG 6 the databases in the information manager are stored as linked lists 45, 46, 47 and 48. Exact copies of these linked lists, called virtual lists 49, 50, 51 and 52, are kept in the computer device 2. These virtual lists enable the computer device 2 to perform the logic needed to add, modify and delete records in the information manager 1, because the computer device 2 always knows where in the linked lists records are found and the neighbors of the record. To add a record the computer device 2 simply inserts it into the particular linked list. A virtual list 49-52 can contain records already in the linked list and records not yet added to the list. The records already in the list have the position, previous and next fields filled and they can be marked dirty or marked for deletion. Records not yet added to the list are waiting to be assigned a position in the linked list. This will be done at the next transfer. In order to keep the virtual lists updated with data from the real databases, it always

WO 99/34631

12

PCT/SE98/02445

"listens" for changes in the respective databases calendar 53, tasks 54, and contacts 55 of the computer device 2. If a record changes in one of these databases 53, 54 and 55 the corresponding record will be found in the virtual list and the record will be updated with new data and marked
5 dirty. At the next connection between the computer device 2 and the information manager 1 the computer device 2 will transfer the change to the information manager 1. Similarly new records and records to be deleted are detected.

10 An inbox database 56 is associated with the information application, storing information collected on the Internet like weather forecasts, stock quotations etc, as described above.

Further it is possible for the user to make adjustments to the user interface in the information manager 1,
15 such as set the update intervals, define filters, set alarms and time sounds and synchronize the time in the information manager 1 with the computer device time. It is also possible to reset the databases 45-48 in the information manager 1 and to force an update. These updates and
20 adjustments are performed via a custom application 57 in the computer device 2.

An important characterizing feature of the method according to the invention is the possibility of
25 registering and storing time-stamps for events associated with for example tasks in the tasks database 54. This is accomplished by performing a particular button sequence, wherein the current event time is registered and the information is sent to the computer device 2 from the information manager 1. The current time-stamp for this particular event is stored in the record of the associated task. It is also possible to store time intervals such as the time between the beginning of a particular task and the end of the task. When the task starts the user presses a
30 button sequence on the information manager 1 and the
35

WO 99/34631

PCT/SE98/02445

13

current start time is stored in the EEPROM 30 of the information manager 1. At the end of said task the user press another button sequence on the information manager 1, wherein the stop-time is registered. Further, the time-
5 stamp is calculated and stored in the EEPROM 30 in a record associated with the particular task. The information is sent to the computer device as a regular command transfer from the information manager 1 to the computer device 2, as described above.

10 Hence, the present invention provides a personal information management system capable of establishing a bi-directional link 3 between the information manager 1 and the computer device 2 for information exchange between the information manager and the computer device. The present
15 disclosure of the embodiment described is to be considered as an exemplification of the invention and it is not intended to limit the invention to this specific embodiment.

For example, in another embodiment of the invention
20 said information manager 1 can be in the shape of a mobile telephone, and said computer device 2 can be a laptop, a notebook, a hand-held computer, or a mobile telephone etc. Further, said computer device 2 can be any communication system, such as a LAN (Local Area Network) or a GSM (Global
25 System for Mobile communications) system. The bi-directional link 3 can be implemented as an IR (infra red) link in other embodiments. In the described embodiment said buttons (5, 6, 7, 8) are used as input means, but said information manager 1 can be controlled via voice input in
30 another embodiment. Additional databases, applications and functions can be added to the invention, but nevertheless be within the scope of the invention, as defined in the appended claims.

WO 99/34631

14

PCT/SE98/02445

CLAIMS

1. A personal information management system,
comprising at least a personal information manager (1),
including first transceiver means (32) and first storage
5 means (30) for personal information, and at least a
communication system (2), including second storage means
for personal information, connected to second transceiver
means (2'), c h a r a c t e r i z e d by a bi-directional
link (3) between said first and second transceiver means
10 for automatic information exchange between said system (2)
and said information manager (1), when said system (2) and
information manager (1) are within the range of said link
(3).
- 15 2. A personal information management system according
to claim 1, c h a r a c t e r i z e d in that said link
(3) is a radio link or an IR (infra red) link.
- 20 3. A personal information management system according
to claim 1 or 2, c h a r a c t e r i z e d by communi-
cations protocol means (16,18,20) enabling personal
information stored in said first storage means (30) of said
information manager (1) to be transferred without user
interaction, via said link (3), to/from said second storage
25 means of said communication system (2), when the
transceiver (2') of said system (2) and information manager
(1) are within the range of said link (3).
- 30 4. A personal information management system according
to any of the preceding claims, c h a r a c t e r i z e d
in that said information manager (1) comprises a micro-
controller (26) as processing element, a display (27),
communicating with the microcontroller (26) via built-in
bus interface (28), a backlight driver circuit 29 for
35 backlighting said display (27), storage means (30) for
storing user data, wherein all memory accesses from said

WO 99/34631

15

PCT/SE98/02445

microcontroller (26) to said storage means (30) are performed via the bus interface (28), a calendar circuit (31), also attached to the bus interface (28), said first transceiver means (32) for communication with said computer
5 device (2), a serial bus (33) for data transfer to/from said transceiver (32) and said microcontroller (26), a piezoelectric sounder element (34), a button set (35), both connected to the microcontroller (26) via a parallel bus (36), and an integrated real-time clock (36') for gene-
10 ration of suitable timing signals for the various clock functions.

5. A method of information exchange between at least a personal information manager (1), including first
15 transceiver means (32) and first storage means (30) for personal information, and at least a communication system (2), including second storage means for personal information, connected to second transceiver means (2'), characterized by the steps of:

20 establishing a bi-directional connection (3) between said system (2) and said information manager (1);

if information in said system (2) is modified or discarded, sending command signals via said connection (3) to said information manager (1) causing manipulations of
25 databases and settings in said information manager;

sending polling command signals from said system (2) to said information manager (1) causing a change of the transfer direction enabling said information manager (1) to send command signals to said system (2); and

30 if information in said information manager (1) is modified or discarded, sending command signals via said connection (3) to said system (2) causing manipulations of databases in said information manager (1); and

disconnecting the connection.

35

WO 99/34631

PCT/SE98/02445

16

6. A method according to claim 5,
c h a r a c t e r i z e d in that preceding the step of
establishing a bi-directional connection (3) it includes
the further step of:

5 at a particular event storing a current event time,
read from said real-time clock (36'), as modified infor-
mation, in a first storage means (30) by activation of
input means (5,6,7,8) on said information manager (1).

10 7. A method according to claim 5,
c h a r a c t e r i z e d in that preceding the step of
establishing a bi-directional connection (3) it includes
the further steps of:

15 at the beginning of a particular task, storing the
current start time, read from said real-time clock (36'),
as modified information, in a first storage means (30) by
activation of said input means (5,6,7,8) on said
information manager (1); and

20 at the end of said task, storing the current stop
time, read from said real-time clock (36'), as modified
information, in said first storage means (30) by activation
of said input means (5,6,7,8) on said information manager
(1).

WO 99/34631

PCT/SE98/02445

1/5

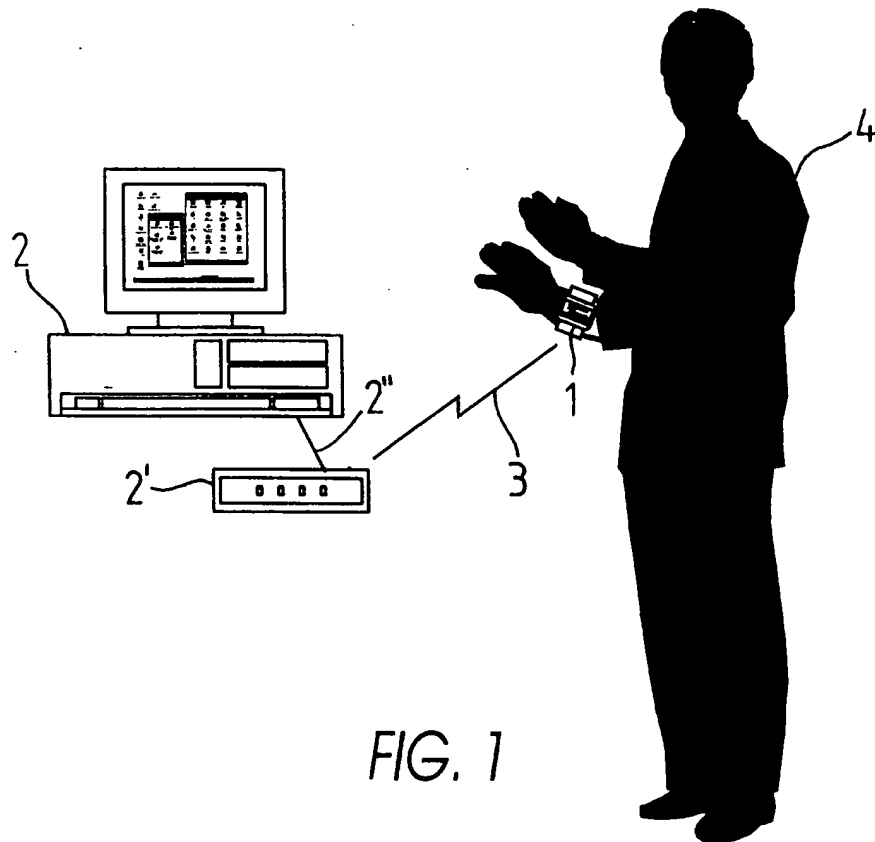


FIG. 1

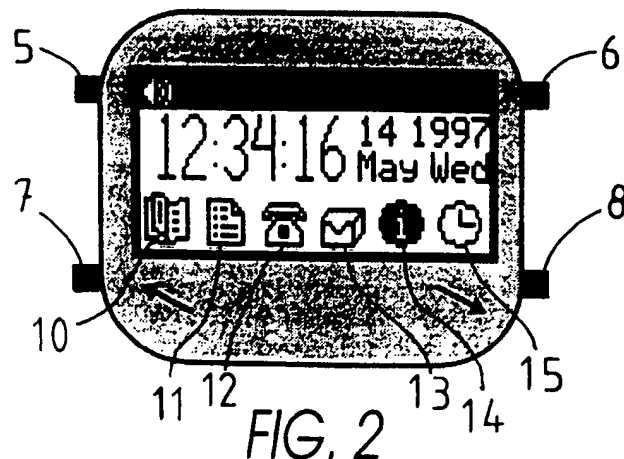


FIG. 2

WO 99/34631

PCT/SE98/02445

2/5

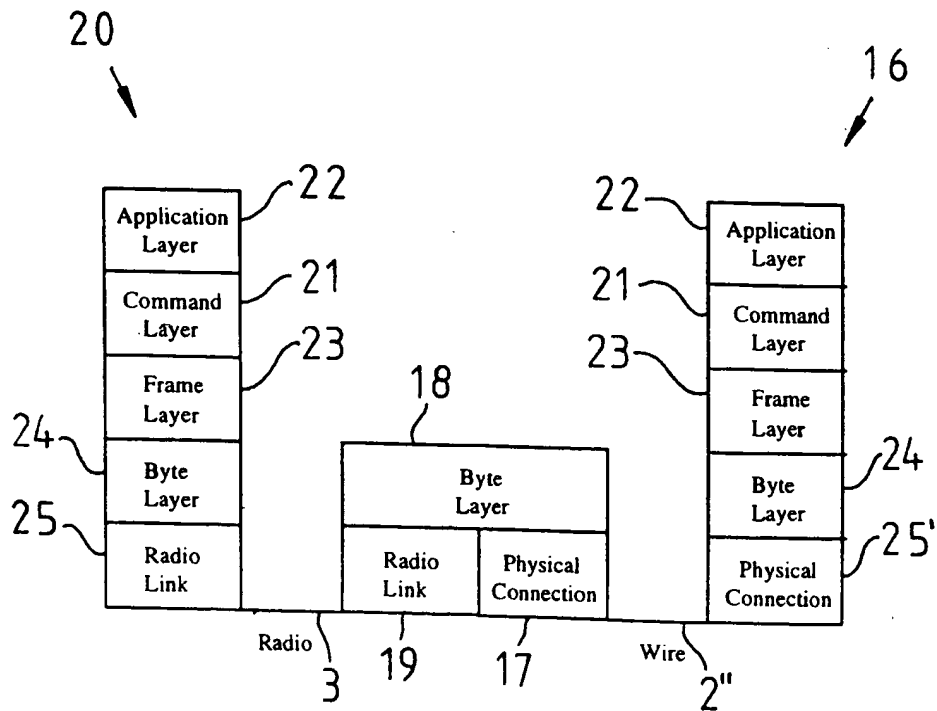


FIG. 3

WO 99/34631

PCT/SE98/02445

3/5

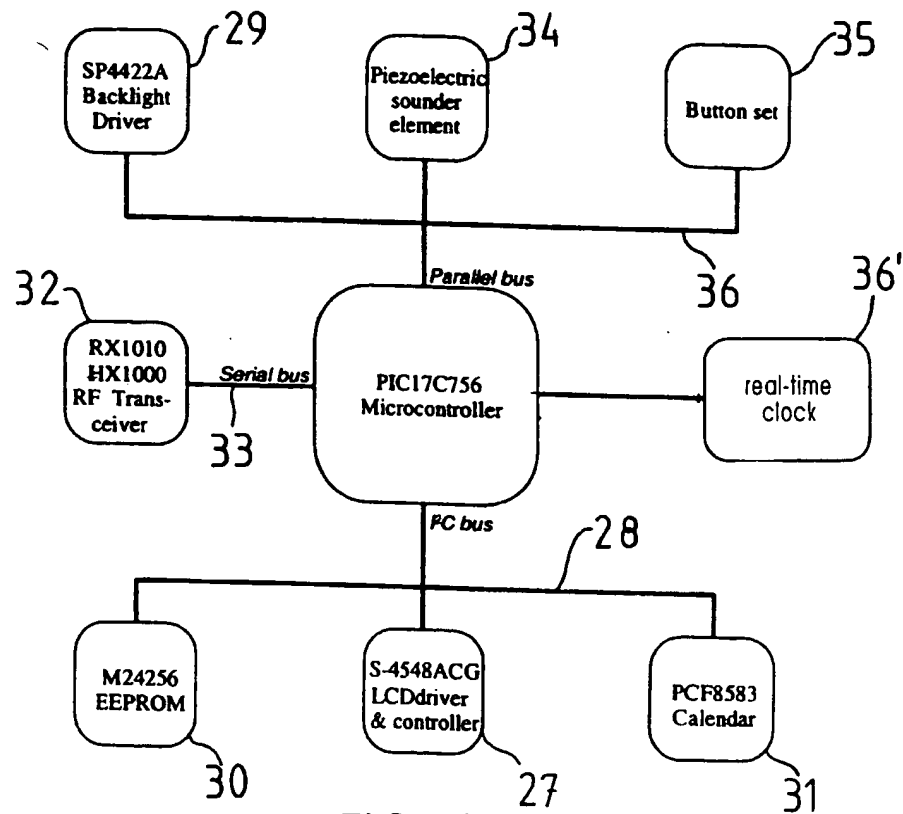


FIG. 4

WO 99/34631

PCT/SE98/02445

4/5

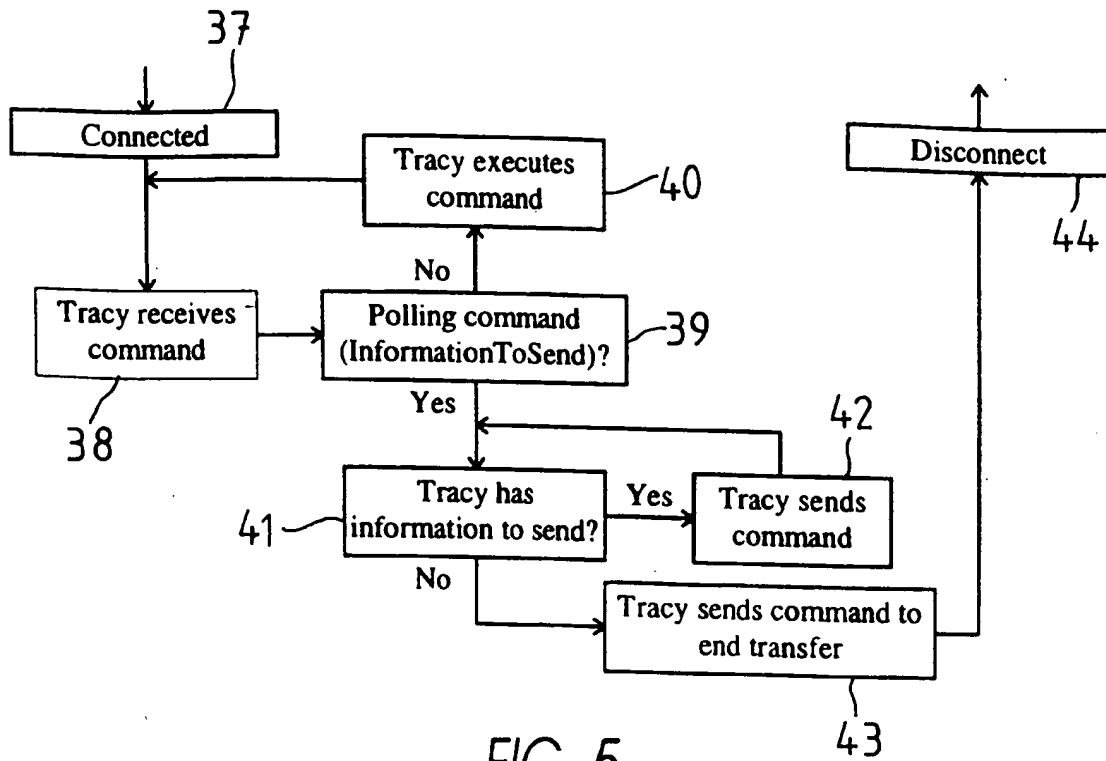


FIG. 5

WO 99/34631

PCT/SE98/02445

5/5

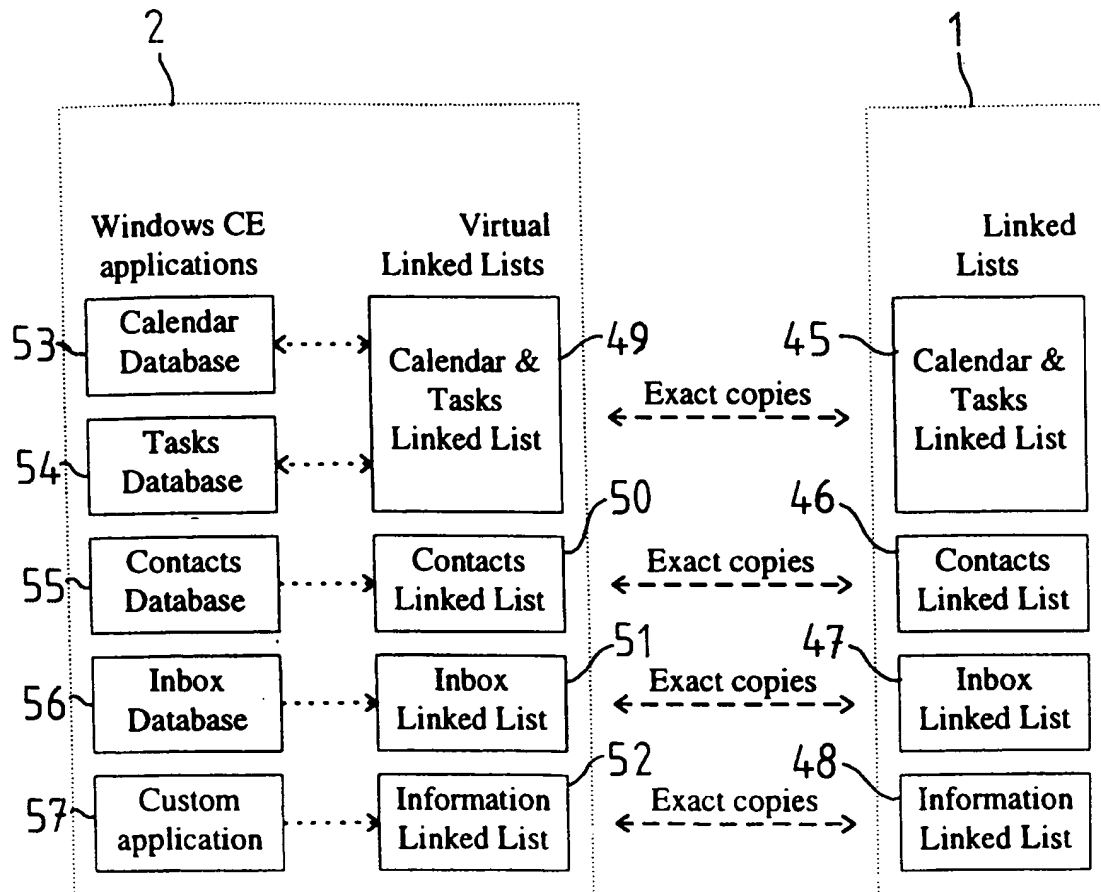


FIG. 6

1

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/02445

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: H04Q 7/32, G06F 13/00 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: H04Q, H04B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPIL, EDOC, JAPIO		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9602036 A1 (ELONEX TECHNOLOGIES, INC.), 25 January 1996 (25.01.96), page 4, line 8 - line 16; page 21, line 8 - line 19; page 31, line 1 - line 5, figure 13	1-3,5
Y	--	4,6-7
X	WO 9729606 A1 (BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY), 14 August 1997 (14.08.97), page 1, line 23 - page 2, line 14; page 3, line 28 - page 4, line 5; page 11, line 21 - page 12, line 32	1-3,5
Y	--	4,6-7
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
1 June 1999		07-06-1999
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Stefan Hermanson/mj Telephone No. +46 8 782 25 00

2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/02445

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5634100 A (STEPHEN P. CAPPS), 27 May 1997 (27.05.97), figure 1	4
A	--	1-3,5-7
Y	Patent Abstracts of Japan, abstract of JP 6-188780 A (TOKYO GAS LTD), 8 July 1994 (08.07.94)	6-7
	--	
X	US 5016269 A (STEPHEN W. ROGERS), 14 May 1991 (14.05.91), column 1, line 58 - column 3, line 23	1-3
	--	
A	WO 9747120 A2 (AT&T CORP.), 11 December 1997 (11.12.97), page 5, line 5 - line 21; page 13, line 19 - line 23	1-7
	-- -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

03/05/99

International application No.

PCT/SE 98/02445

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
WO	9602036	A1	25/01/96	US 5692199 A	25/11/97
WO	9729606	A1	14/08/97	AU 1553097 A	28/08/97
				CA 2242180 A	14/08/97
				EP 0880865 A	02/12/98
				NO 983676 A	11/08/98
				AU 3950197 A	06/03/98
				EP 0825791 A	25/02/98
				WO 9807287 A	19/02/98
				GB 9602804 D	00/00/00
				AU 689734 B	02/04/98
				AU 7580296 A	05/06/97
				BR 9607088 A	11/11/97
				CZ 9702217 A	17/12/97
				EP 0802951 A	29/10/97
				GB 9602790 D	00/00/00
				NO 973232 A	11/09/97
				GB 9617131 D	00/00/00
US	5634100	A	27/05/97	NONE	
US	5016269	A	14/05/91	NONE	
WO	9747120	A2	11/12/97	CA 2228169 A	11/12/97
				EP 0852871 A	15/07/98
				JP 10512134 T	17/11/98
				NO 980461 A	03/02/98